




CPV F300 250 S2

SKU: CPV250F30050

Induction fan for CO ventilation and smoke exhaust, series CV. Direct driven centrifugal backward wheel. Galvanized steel coated with RAL. Three-phase engine IP55. Induction fan under Norm EN 12101-3, in F300 (120'). Working service S1 (continuous) (S1) and 300°C for 120 minutes (S2) with an ignition switch function.

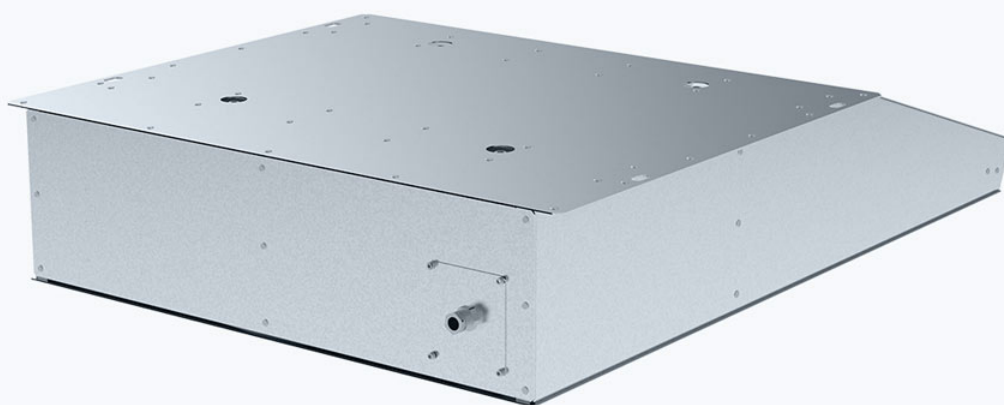

ESPECIFICACIONES TÉCNICAS

Model	CPV F300 250 S2
Motor	Norm motor IP55 0,3 / 1,2 kW 400 / 3 / 50
Thrust	13 / 50 N
Speed	700 / 1.400 rpm.
Air Speed	12,7 / 25,4 m/s
In max	1,5 / 3,3 A
Casing	Steel galvanized / coated in every RAL color
Application	Suitable for temperatures up to 40°C continues and 300°C for 120 minutes (F300). Also ambient execution.